

Standard Building Package Includes:

- 24' Wide x 30' Long Steel Building
- 10' Eave Height
- 1'-4" Overhang
- 3/12 Roof Pitch
- 'AWR' Roof & Wall Cladding (Standard Colours)
- G90 Light gauge structural building components
- Structural Drawings

Package 1

Standard Package Details

- (1) 16' Wide x 7' High Overhead Door Opening*

Package 2

Standard Package Details

- (2) 9' Wide x 7' High Overhead Door Opening*

Options

- 3' x 7' Walk Door Opening*
- 3' x 2' Window Opening**
- Additional 10' in Length (max of 50'-0" overall)

PACKAGE 1



PACKAGE 2



*Door not included

**Window not included

***Gutters and downspouts not included

DESIGN LOADS and CODE INFORMATION [psf : (kPa)] - MAXIMUM LOADS ** PLEASE VERIFY LOAD CONDITIONS **									
Ss	Sr	Snow	Collateral	Q 1/50	Wind Exp.	Sa(0.2)	Sa(0.5)	Sa(1.0)	Sa(2.0)
60.61	8.36	56.85	0	17.14	Open	0.66	0.32	0.13	0.044
(2.90)	(0.40)	(2.72)	(0.00)	(0.82)	Bldg. Imp:	Normal (1.0)		Site Class:	C
Building Code:		NBC 2005/2010		Panel & Secondary Dead Load [psf : (kPa)]		3.50		(0.17)	
Building Category:		2 (Partially Enclosed)		Special Loads:		N/A			

STANDARD COLOURS



Bone White

QC 18403



Regent Grey

QC 18730



Black

QC 18262



Heron Blue

QC 18330



Dark Red


QC 18250



Melcher's Green

QC 18307

CLADDING PROFILES

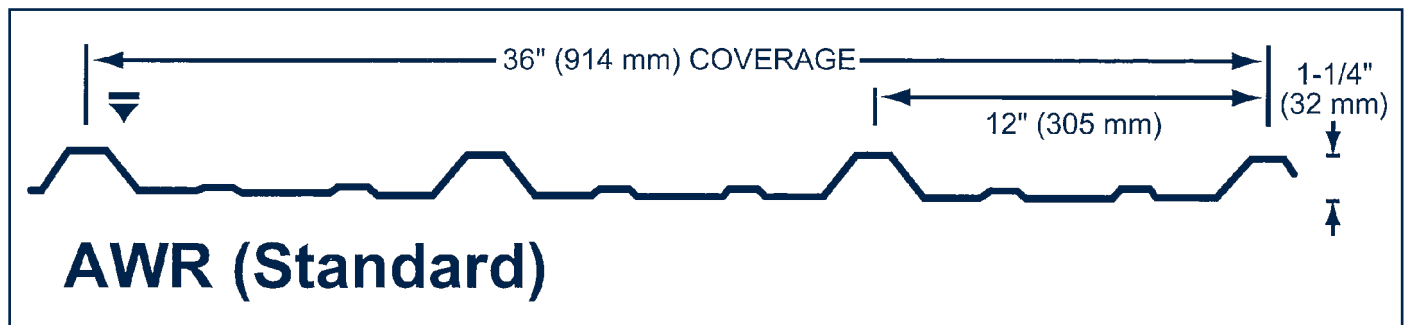

- U-Build Steel Buildings reserves the right to change colour availability without notice.
- Other colours may be available; consult factor for pricing and delivery schedule
- Trim can be provided in all available colours
- Galvalume™ panel material to ASTM A792 Az150 Aluminum Zinc Coating
- Galvanized panel material to ASTM A653 Z275 Zinc Coating

INDUSTRIAL | COMMERCIAL | RECREATIONAL | INSTITUTIONAL